

National EMS Quality Alliance

Safety-01 Measure Package

Disclaimer

EMS Performance Measures (Measures) and related data specifications developed by the National EMS Quality Alliance (NEMSQA) are intended to facilitate quality improvement activities by EMS professionals.

These measures are intended to assist EMS professionals in enhancing quality of care. These Measures are not clinical guidelines and do not establish a standard of medical care and have not been tested for all potential applications. NEMSQA encourages testing and evaluation of its Measures.

Measures are subject to review and may be revised or rescinded at any time by NEMSQA. The measures may not be altered without prior written approval from NEMSQA. The measures, while copyrighted, can be reproduced and distributed, without modification, for noncommercial purposes (e.g., use by health care providers in connection with their practices). Commercial use is defined as the sale, license, or distribution of the measures for commercial gain, or incorporation of the measures into a product or service that is sold, licensed, or distributed for commercial gain. Commercial uses of the measures require a license agreement between the user and NEMSQA. Neither NEMSQA nor its members shall be responsible for any use of the measures.

THESE MEASURES AND SPECIFICATIONS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND.

©2019 National EMS Quality Alliance. All rights reserved.

Limited proprietary coding is contained in the measure specifications for convenience. Users of the proprietary coding sets should obtain all necessary licenses from the owners of these code sets. NEMSQA and its members disclaim all liability for use or accuracy of any Current Procedural Terminology (CPT®) or other coding contained in the specifications. ICD-10 copyright 2019 International Health Terminology Standards Development Organization.

CPT ® is a registered trademark of the American Medical Association and is copyright 2019. CPT® codes contained in the Measure specifications are copyright 2004-2019 American Medical Association



Safety-01 – Safety-02: Use of Lights and Sirens During Response/Transport

Safety-01 Safety-02 focus on the judicious use of lights and sirens during response to scene (Safety-01) and during patient transport (Safety-02). These measures may have the strongest evidence any measure in the EMS Compass Measure Set. There are strong guidelines and published studies that support the limited use of lights and sirens to protect not only the public but also EMS providers and patients from potential danger, as a consequence of lights and sirens use. The intent of these two measures is to determine how often EMS professionals are not using lights and sirens during response and transport.

The denominator for these measures is the total number of EMS responses/transports originating from a 911 request. The TEP decided not to add denominator exclusions to these measures, as even though there may be times were an EMS provider is responding to a high-risk emergency or transporting a high-acuity patient, the principle this measure was built upon is, *Above All Do No Harm*, and in order to uphold this principle and the intent of the measures, lights and sirens usage on all EMS responses and transports will be measured.

The numerator for both Safety-01 and Safety-02 was changed during the measure respecification process. The original measures released as part of the candidate EMS Compass measure set were inverse measures, meaning lower measure scores indicated better quality. However, to eliminate confusion of the measure score interpretation, the TEP decided to change the measures to standard scoring, where higher scores will indicate better quality. This means the numerator for both Safety-01 and Safety-02 measure the process in which lights and sirens were **not** used.

The TEP understands the use of lights and sirens is often governed by state or local agency protocols. However, quality measures are built upon published guidance and rationale and the intent is to drive change. While individual EMS providers may still have to follow written protocols, NEMSQA and the TEP hopes that these quality measures will help drive change at the state and local levels, so protocols that are more in-line with the guidelines and evidence for lights and sirens use can be developed.

Safety-01: Use of Lights and Sirens During Response to Scene

Measure Score Interpretation: For this measure, a higher score indicates better quality.

| Measure Description | | |
|--|---|--|
| Percentage of EMS responses originating from a 911 request in which lights and sirens were not | | |
| used during response. | | |
| Measure Components | | |
| Numerator Statement | EMS responses originating from a 911 request during which lights | |
| | and sirens were not used. | |
| Denominator | All EMS responses originating from a 911 request. | |
| Statement | | |
| Denominator | None | |
| Exclusions | | |
| Denominator | None | |
| Exceptions | | |
| Supporting Guidance | The following evidence statements are quoted verbatim from the | |
| & | referenced guidance: | |
| Other Evidence | | |
| | U.S. Department of Transportation, National Highway Traffic Safety | |
| | Administration, Office of Emergency Medical Services: Lights and | |
| | Siren Use by Emergency Medical Services (EMS) Above All Do No | |
| | Harm: ⁱ | |
| | | |
| | Recommendations for EMS Vehicle Operators: | |
| | The driver is responsible for the mode of response to the scene | |
| | based | |
| | | |
| | upon dispatch category, information available from dispatcher, and | |
| | agency policy | |
| | The EMS provider, with the highest level of training, caring for | |
| | the | |
| | matiant should direct whather are not I BC are used dyning transment | |
| | patient should direct whether or not L&S are used during transport | |
| | based upon the patient's medical condition and potential benefit of | |
| | time saved with L&S transport. | |
| | <u> </u> | |
| | L&S merely request the right of way from other drivers, but | |
| | neither | |
| | emergency warning lights nor siren are very effective. Do not assume | |
| | that your vehicle has been seen by other drivers, and always proceed | |
| | with caution and due regard. | |
| | Consider the following when driving an EMS vehicle: | |
| | - Consider the following when driving an Livis vehicle. | |

- Automatic daytime running lights or manual headlights increase vehicle visibility and should be on at all times when vehicle is moving
- o Both L&S should be used when exercising moving privileges (e.g. traveling through a red traffic signal or in travel lanes that oppose normal traffic). Likewise, if the driver does not intend to exercise these privileges, neither lights nor siren should be used during the response or transport. Traffic is confused by an EMS vehicle that approaches an e signal to turn green if the traffic has given the right of way.
- EMS vehicle operators (assisted by EMS provider passengers) should ensure eye contact with other drivers and clear intersections before proceeding through intersections against a red traffic signal or stop sign.
- EMS vehicle drivers should primarily use a combination of wail and yelp when "requesting right-of-way" with a siren. High-low and air horns are less effective siren modes.
- EMS agencies and EMS vehicle operators should avoid continuous use of siren during L&S response or transport and should limit the siren use when needed to "request right-of-way" or when exercising privileges only permitted by emergency vehicles with L&S. Using sirens when travelling at highway speeds with traffic or when traveling unimpeded without exercising emergency vehicle privileges may impede crucial communication related to the response or patient care.
- Avoid flashing white lights after dark, as these may blind oncoming drivers.
- Do not exceed the posted speed limit in EMS vehicles (some experts suggest not exceeding the speed limit by more than 10 mph).
- Drivers should have the mindset that L&S use is only asking permission of other drivers – never assume that permission will be granted.
- Come to a "full stop" at red traffic signals or stop signs before proceeding, when using L&S.
- o Limit speed to less than 20 mph when traveling in a lane opposing the normal flow of traffic.


- O Downgrade L&S use if not indicated after more information becomes available during response or transport.
- o L&S are not indicated if ALS is not indicated.
- L&S use is a medical treatment that should be used only when indicated.
- Consider specific approach to crossing intersections during EMS vehicle L&S driving (From Ambulance Insurance Services, Inc. Sample Intersection Crossing Policy).
 - Crossing on Green slow down, look all 3 directions, proceed with caution.
 - Crossing on Red come to complete stop, make eye contact with drivers of another vehicles, wait for partner to communicate all clear, wait 2 seconds, proceed with caution.
 - Making right or left turns across stopped vehicle come to complete stop next to vehicle, establish eye contact via partner or self, wait for partner to tell you all clear, be aware of vehicles from behind, proceed with caution.
 - Other use yelp siren mode, use headlights hi-lo beam, be patient.
 - Other avoid passing on the right unless it is the last resort.
 - Other avoid traveling in opposing traffic unless you are certain traffic is clear. If you must, use extreme caution and stay to your far right.
- When "blocking the right-of-way" at a scene, consider altering the lighting pattern of the vehicle with the goal of drawing attention without blinding or overwhelming other drivers.
 - Do not use headlights or flashing white lights.
 - Consider decreasing the number and intensity of flashing lights overall.
 - Consider using scene floodlights to illuminate the scene and areas around the vehicle.
 - Consider turning off distracting flashing emergency lights if the EMS vehicle is not the primary vehicle "blocking the right-of-way" for traffic.

| Measure Importance | Consider using amber warning lights to warn of hazards ahead or amber directional signals to direct traffic away from hazards. |
|---|---|
| Rationale | When the National Highway Traffic Safety Administration reviewed two decades of data in 2005, it was found that there is an average of 4,500 MVC's involving ambulances each year, and of these crashes, and average of 34% involve injuries and 33 people are killed. ⁱⁱ A 1999 study of ambulance response times in Syracuse, New York found that the use of lights and sirens reduced ambulance response times by an average of 1 minute, 46 seconds, which is statistically |
| | significant but unlikely to make a difference in clinical outcomes for most patients. ⁱⁱⁱ |
| | A 2005 study of motor vehicle crashes in Pennsylvania found that ambulances were more likely to be in crashes at intersections and traffic signals than other vehicles of similar size. In addition to the increased MVC rate for ambulances, the study found that MVC crashes involving ambulances typically involve more people and more injuries than MVCs among vehicles of similar size. iv |
| Measure Designation | |
| Measure purpose | ■ Quality Improvement |
| | ■ Accountability |
| | • □ MOC |
| Type of measure | ■ Process |
| | ● □ Outcome |
| | |
| | • Efficiency |
| National Quality | □ Clinical Process-Effectiveness |
| Strategy/Priority/CMS Measure Domain | ▶ ☑ Patient Safety |
| Weasure Domain | ■ Patient Experience |
| | • □ Care Coordination |
| | • ☐ Efficiency: Overuse |
| | • ☐ Efficiency: Cost |
| CMC M : C 1 | Population & Community Health |
| CMS Meaningful Measure Domain | Medication Management |
| Masure Domain | Admissions and Readmissions to Hospitals Admissions and Readmissions to Hospitals |
| | • ☐ Transfer of Health Information and Interoperability |
| | • Preventative Care |
| | Management of Chronic Conditions Description Des |
| | • Prevention, Treatment, and Management of Mental Health |
| | ■ Prevention and Treatment of Opioid and Substance |

| | □ Diele Adinated Mantality |
|----------------------|---|
| | Risk Adjusted Mortality ——————————————————————————————————— |
| | ■ Equity of Care |
| | □ Community Engagement |
| | ■ Appropriate Use of Healthcare |
| | ■ Patient-focused Episode of Care |
| | □ Risk-Adjusted Total Cost of Care |
| | Healthcare-associated infections |
| | ■ Preventable Healthcare Harm |
| | □ Care is Personalized and Aligned with Patient's Goals |
| | ■ End of Life Care according to Preferences |
| | ■ Patient's Experience of Care |
| | ■ Patient Reported Functional Outcomes |
| Level of measurement | ■ Individual EMS Professional |
| | ■ EMS Agency |
| Care setting | ⊠Pre-Hospital Care |
| Data source | ■ Electronic Patient Care Record (eCPR) data |
| | • ☐ Administrative Data/Claims (inpatient, outpatient or |
| | multiple-source claims) |
| | ■ Paper medical record/Chart abstracted |
| | ■ Registry |



Clinical Quality Measure Flow for Safety-01 Use of Lights and Sirens During Response to Scene

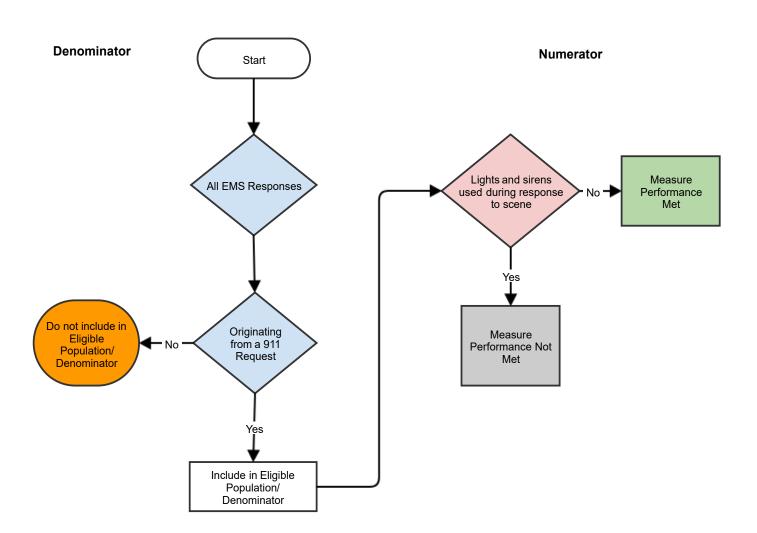

NEMSIS Pseudocode: Safety-01: Use of Lights and Sirens During Response to Scene

| Measure Components | |
|---------------------------|---|
| Numerator | eResponse.24 Additional Response Mode Descriptors is |
| Pseudocode | 2224019 ("No Lights or Sirens"), |
| | |
| Denominator | eResponse.05 Type of Service Requested is 2205001 ("911 |
| Pseudocode | Response (Scene)") |

¹ Kupas, D.F. (2017) Lights and Siren Use by Emergency Medical Services (EMS): Above All Do No Harm. U.S. Department ^{Of} Transportation, *National Highway Traffic Safety Administration, Office of Emergency Medical Services*, 49-51.

[&]quot;Smith, N. (2005) A National Perspective on Ambulance Crashes and Safety, EMS World, 2015; 44(9): 91-94.

iii Lawrence H. Brown, Christa L. Whitney, Richard C. Hunt, Michael Addario & Troy Hogue (2000) Do Warning Lights and Sirens Reduce Ambulance Response Times? *Prehospital Emergency Care*, 4:1, 70-74

 $^{^{\}text{iv}}$ Ray, A.F. & Kupas, D.F. (2005) Comparison of Crashes Involving Ambulances with Those of Similar-Sized Vehicles, *Prehospital Emergency Care*, 9:4, 412-415.